



Control switch

Our new line-up digital camera ARTCAM-130MI-HDMI-LG is for high resolution image. It is able to connect

to a HDMI monitor directly.

And it is equipped a control switch to control 2 crosshair cursors on a monitor.

1.3mega pixels HDMI high resolution digital monitor output camera.
<Attached a control switch to control 2 crosshair cursors>


ARTCAM-130MI-HDMI-LG

Why do you still use an analog camera?

Here comes the reasonable price high-vision digital camera!

- Embedded USB2.0 interface
- HDMI(High Definition Multimedia Interface) Ver1.2
- 1.3M Pixel CMOS sensor
- Color / Monochrome
- SXGA 15FPS

- Sensor : 1.3M Pixel CMOS
- Active Pixels : 1280(H) × 1024(V)
- Active Imager Size : 5.2 × 5.2 μm
- Transfer Method : Progressive Scan
- Shutter Type : Rolling Shutter
- Lens Mount : C Mount
- Output : USB2.0(8 or 10bit digital output)
HDMI Ver1.2 1080p@60
- USB Standard : USB2.0 Bulk transfer, Streaming output
- Size : 50(W) × 56(H) × 75(D)mm
- Power Supply : DC3.3V 2A outlet
- Running Temperature : 0~35°C (Recommended)
- Operation System : Windows XP / Vista
- Recommended PC : CPU - Pentium4 Above 1.7GHz
(Need embedded USB2.0 port)
Memory - Above 512MB
- Attached Items : Device Driver, Viewer Software
DC3.3V AC Adapter, 1.8m USB cable
- Option : C Mount Lens, HDMI Monitor
1.5m / 3m / 5m HDMI Cable
HDMI-DVI converting connector
DVI cable, SDK

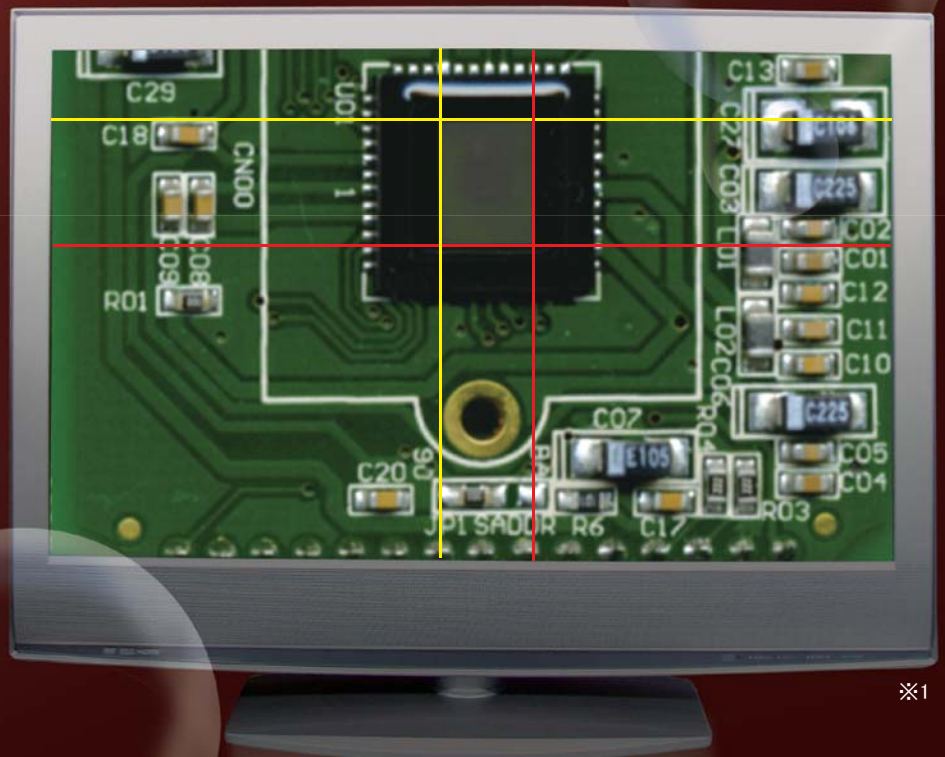

※1 You can control only 1 vertical line and 1 horizontal line at once.

※1